



FEATURES

- * Ideal for surface mount applications
- * Easy pick and place
- * Built-in strain relief
- * Low forward voltage drop

MECHANICAL DATA

- * Case: Molded plastic
- * Epoxy: UL 94V-0 rate flame retardant
- * Metallurgically bonded construction
- * Polarity: Color band denotes cathode end
- * Mounting position: Any
- * Weight: 0.063 grams


VOLTAGE RANGE

60 Volts

CURRENT

5.0 Amperes

DO-214AC(SMA)

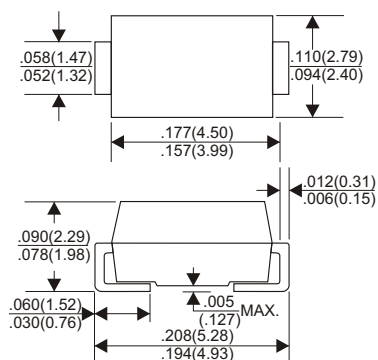

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating 25°C ambient temperature unless otherwise specified.
Single phase half wave, 60Hz, resistive or inductive load.
For capacitive load, derate current by 20%.

| TYPE NUMBER | SS56L | UNITS |
|--|------------|-------|
| Maximum Recurrent Peak Reverse Voltage | 60 | V |
| Maximum RMS Voltage | 42 | V |
| Maximum DC Blocking Voltage | 60 | V |
| Maximum Average Forward Rectified Current | | |
| See Fig. 1 | 5.0 | A |
| Peak Forward Surge Current, 8.3 ms single half sine-wave superimposed on rated load (JEDEC method) | 120 | A |
| Maximum Instantaneous Forward Voltage at 5.0A | 0.55 | V |
| Maximum DC Reverse Current Ta=25 °C | 0.15 | mA |
| at Rated DC Blocking Voltage Ta=125 °C | 30 | mA |
| Typical Junction Capacitance (Note1) | 370 | pF |
| Typical Thermal Resistance R JA (Note 2) | 88 | °C/W |
| Operating Temperature Range Tj | -55 → +125 | °C |
| Storage Temperature Range Tstg | -55 → +150 | °C |

NOTES:

1. Measured at 1MHz and applied reverse voltage of 4.0V D.C.
2. Unit mounted on PC board with 5.0mm× 5.0 mm (0.013 mm thick) copper pads as heat sink

RATING AND VCHARACTERISTIC CURVES(SS56L)

FIG.1-FORWARD CURRENT DERATING CURVE

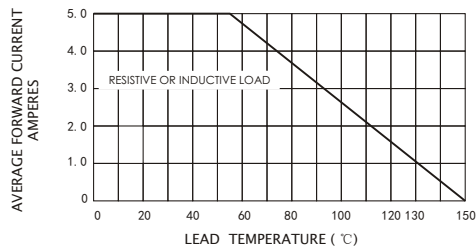


FIG.2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

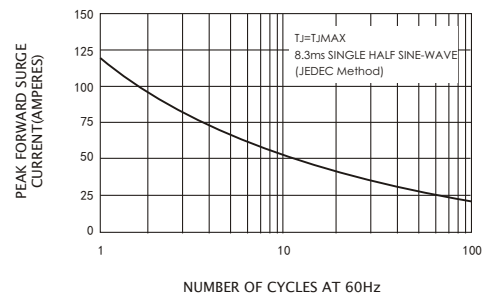


FIG.3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

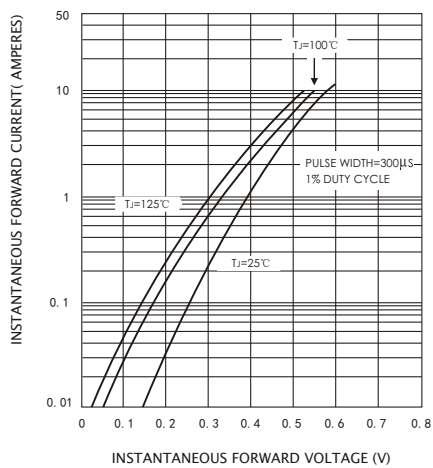


FIG.4-TYPICAL REVERSE CHARACTERISTICS

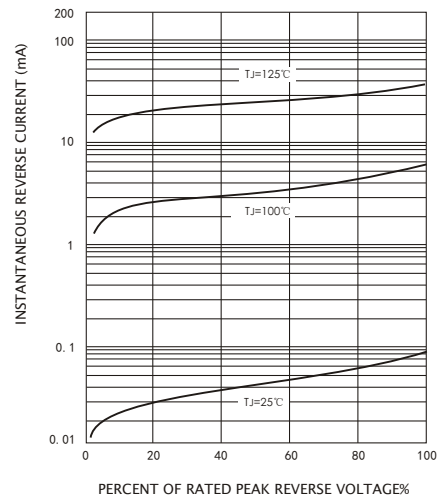


FIG.5-TYPICAL JUNCTION CAPACITANCE

